

ORIGINAL



0000077903

RE: Docket #W03514A-07-0386

Please add to above referenced docket

06

A Quote from Independent Well Driller for 900 Ft Well & Pump System.  
(B&M Well Drillers, Inc.).

Does not include the Storage Tank approximately \$1.00 per gallon for  
Storage for a 50,000 gallon storage the approximate cost would be  
\$50,000.00.

Total Cost for 900 Ft Well & Pump System	\$47,194.89
Storage Tank 50,000 Gallons	\$50,000.00
Total Approximate Cost	\$107,194.89

RECEIVED  
2007 OCT 16 A 10:29  
AZ CORP COMMISSION  
DOCKET CONTROL

Arizona Corporation Commission  
DOCKETED  
OCT 16 2007

DOCKETED BY	nr
-------------	----

# B&M Well Drillers Inc.

11855 E. Wood Drive • Dewey, AZ 86327  
 (928) 632-1911 • Fax: (928) 632-1912  
 www.BMWellDrillers.com • Email: BMWellDrillers@aol.com

## Quotation

Quote Number:  
1116

Quote Date:  
Oct 3, 2007


Page:  
1

Quoted to:  
JIM DUNNE

Customer ID	Good Thru	Payment Terms	Sales Rep
DUNNE	11/2/07	WATER WELL ESTIMATE	

Quantity	Item	Description	Unit Price	Extension
900.00		ESTIMATE FOR DRILLING A NEW WATER WELL 900 FT. IN PAYSON:		
700.00		DRILLING 7" BOREHOLE FROM 0 TO 700FT.	18.00	12,600.00
200.00		DRILLING 7" BOREHOLE FROM 700FT. TO 900FT.	21.00	4,200.00
800.00		800FT. - 4 1/2" SOLID CERTALOC SCH 40 PVC LINER CASING.	6.60	5,280.00
100.00		100FT. - 4 1/2" PERFORATED CERTALOC SCH 40 PVC LINER CASING.	7.06	706.00
1.00		20FT. - 8 5/8" SURFACE STEEL CASING CEMENTED.	700.00	700.00
1.00		GILA COUNTY WELL INSPECTION FEE.	100.00	100.00
1.00		AZ STATE WATER WELL PERMIT FEE.	100.00	100.00
1.00		MOBILIZATION FEE/FUEL FEE.	800.00	800.00
		THANK YOU!		
			Subtotal	24,486.00
			Sales Tax	424.56
			<b>Total</b>	<b>24,910.56</b>

ROC# 183464  
ADWR# 742

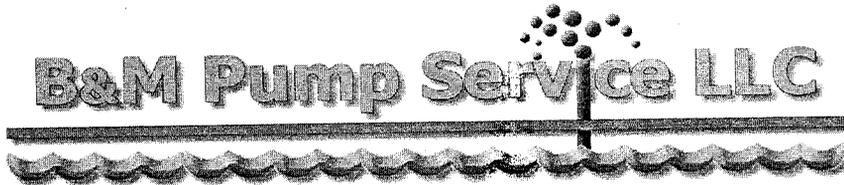

# Quotation

**Donny Roskopf - Owner, Operator**  
 PO Box 1171 • Chino Valley, AZ 86323  
 Licensed & Bonded  
 (928)636-9716 Fax 636-0452

Quote Number:  
m162

Quote Date:

Oct 4, 200

Page:  
1

Quoted to:  
JIM DUNNE

Customer ID	Good Thru	Payment Terms	Sales Rep
DUNNE	11/3/07	PUMP SYSTEM	

Quantity	Item	Description	Unit Price	Extension
1.00		ESTIMATE FOR INSTALLING A GOULDS (10GS50) 5HP PUMP, MOTOR, & CONTROL BOX, 861FT. OF 1 1/4" BLK STEEL SCH. 80 DROP PIPE WITH COUPLERS, 866FT. OF #2 SUBMERSIBLE WIRE, 8" SANITARY WELL SEAL, THREE-1 1/4" CHECK VALVES, PLUMBING PACKAGE, THREE-TORQUE ARRESTORS, LABOR, SALES TAX, & ONE YEAR WARRANTY ON PUMP.  THANK YOU!	22,284.33	22,284.33

Subtotal	22,284.33
Sales Tax	
<b>Total</b>	<b>22,284.33</b>